

Cycle Control Units G32A-EA

Refer to Warranty and Application Considerations (page 1), Safety Precautions (page 4), and Technical and Safety Information (page 6).

Used in Combination with the G3PA to Enable High-precision Temperature Control

- Use cycle control to achieve power control with little noise.
- Used in combination with the G3PA to connect to single- and three-phase loads.
- Three types of input method available: Internal adjuster, external adjuster, or DC signals from 4 to 20 mA.
- Streamline design. Both DIN track mounting and screw mounting possible.
- Use linking terminals for close mounting of the G3PA.
- Built-in isolation transformer.
- Power supply range: 100 to 240 V.



Model Number Structure

Model Number Legend

G32A-EA-US

1 2 3

1. Basic Model Type

G32A: Accessory for G3PA

2. Basic Model Name

EA: Cycle Control Unit

3. Certification

US: Certified by UL and CSA

Ordering Information

List of Models

Name	Isolation transformer	Rated power supply voltage	Model
Cycle Control Unit	Yes	100 to 240 VAC	G32A-EA-US

Specifications

■ Ratings (at an Ambient Temperature of 25°C)


Rated power supply current	50 Hz	100 (200) VAC	40 mA max.
		120 (240) VAC	
	60 Hz	100 (200) VAC	
		120 (240) VAC	
Output signal	15 mA max. at 12 VDC ±15% (at 25°C)		
Input signal	Current signal: 4 to 20 mA (input impedance: 352 Ω) Internal adjuster: 50 kΩ (1/4 W) External adjuster: 50 kΩ (1/4 W)		
Output cycle rate	0 to 100%		
Control cycle	0.2 s		
Number of operable Units	2 G3PA Relays max.		

■ Characteristics


Power supply voltage range	75 to 264 VAC
Dielectric strength	1,500 VAC, 50/60 Hz for 1 minute (between AC power supply and input/output terminals)
Vibration resistance	10 to 55 to 10 Hz, 0.375-mm single amplitude (when mounted to DIN track)
Shock resistance	300 m/s ² (approx. 30 G)
Storage temperature	-30 to 100°C (with no icing or condensation)
Ambient temperature	-30 to 80°C (with no icing or condensation)
Ambient humidity	45% to 85%
Weight	Approx. 100 g

Engineering Data

Output Cycle Rate vs. Setting Value

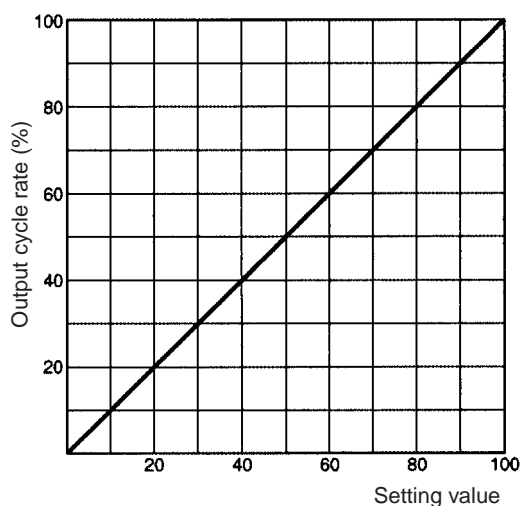


Output Cycle Rate vs. Control Current

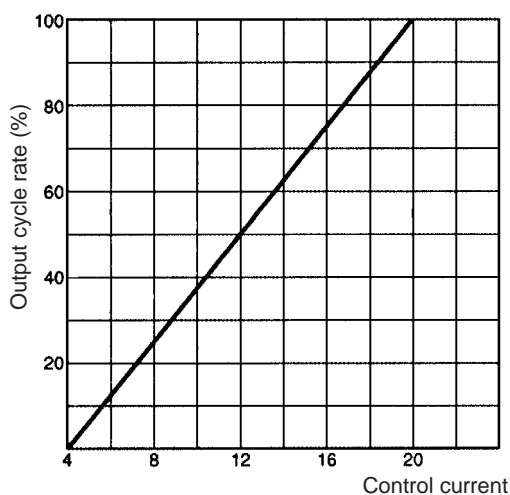

Nomenclature

The following diagram shows the terminals, adjusters, and switches on the G32A-EA.

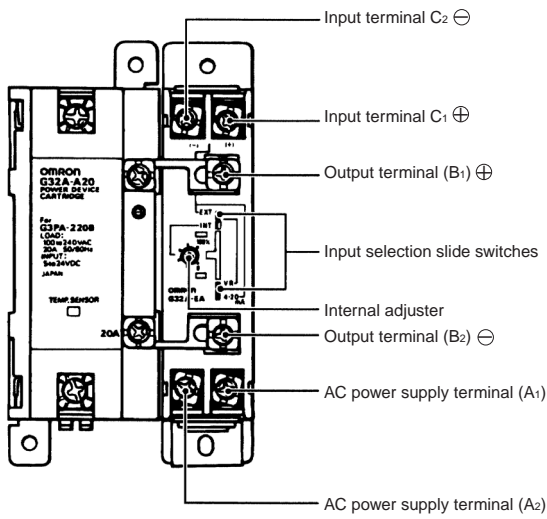

Control method	Input selection slide switches
External adjuster	
Internal adjuster (See note 2.)	
Control current	

- Note: 1.** The input selection slide switches are factory-set to internal adjuster input. Change the setting of the switches for the input method required.
- 2.** When using the internal adjuster, use with the input terminals (C₁, C₂) in the open state. Internal setting is not possible if there is a Temperature Controller or other device connected to C₁ or C₂.


Setting the Input Method

Select external adjuster, internal adjuster, or control current as the input method using the selection switches as shown in the following table.

■ Cycle Control Setting Method

The output cycle rate can be adjusted using the internal or external adjuster.
For current control, refer to the Output Cycle Rate vs. Control Current graph on page 90.


Note: When using the internal adjuster or external adjuster, it is necessary to set the input control method in the way described previously.

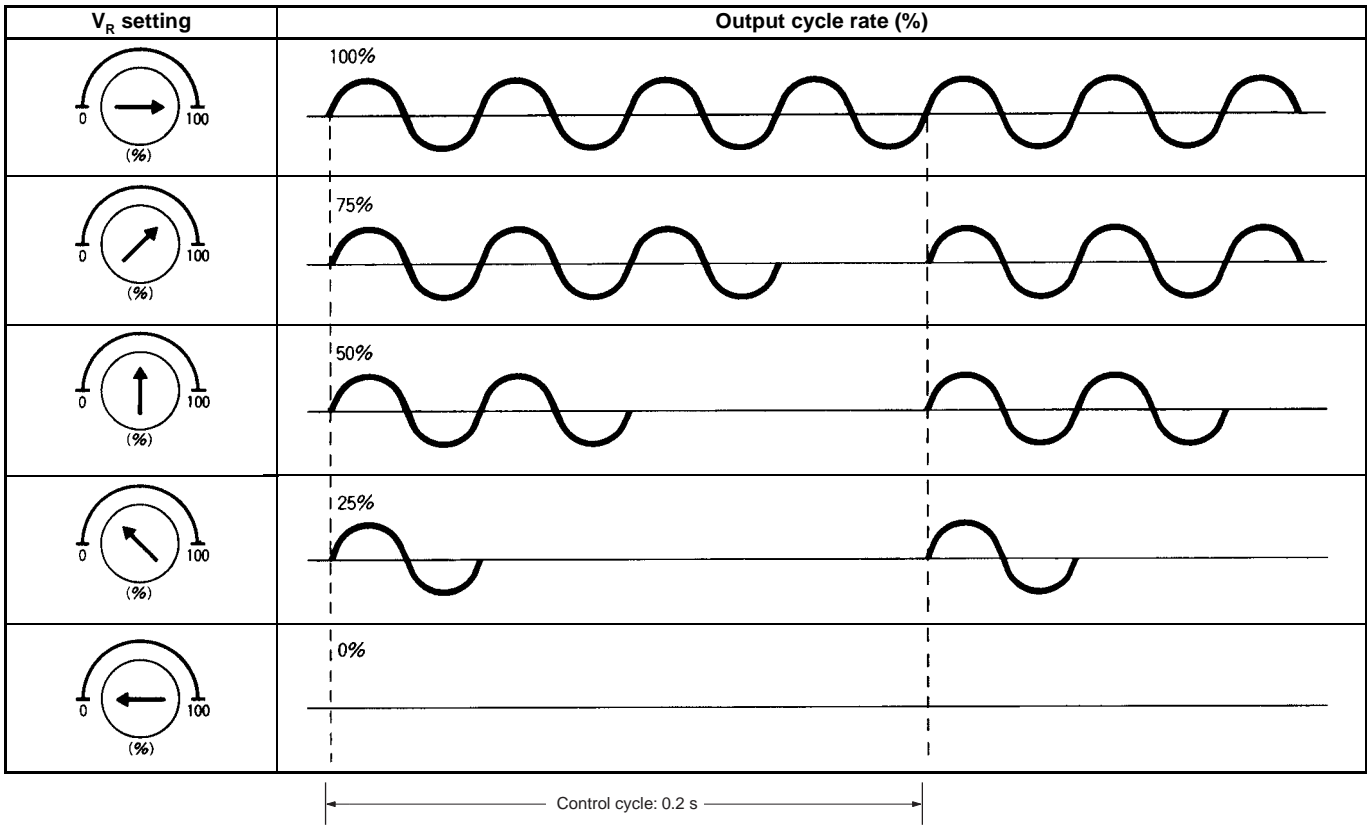

■ Output Power Resolution


When power is controlled using the Cycle Control Unit, the output resolution (minimum variation value) changes depending on the power supply frequency. (SSR with zero cross function)

Control cycle	Output power resolution	
	50 Hz	60 Hz
0.2 s	5%	4.2%

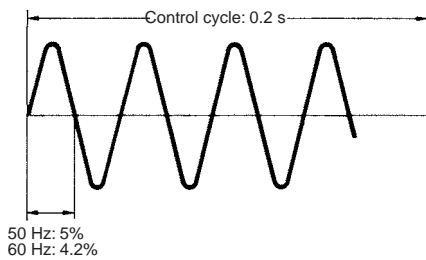

■ Cycle Control Method


The power on the load side can be controlled by adjusting the number of cycles within the control cycle of 0.2 s and repeating this control cycle.

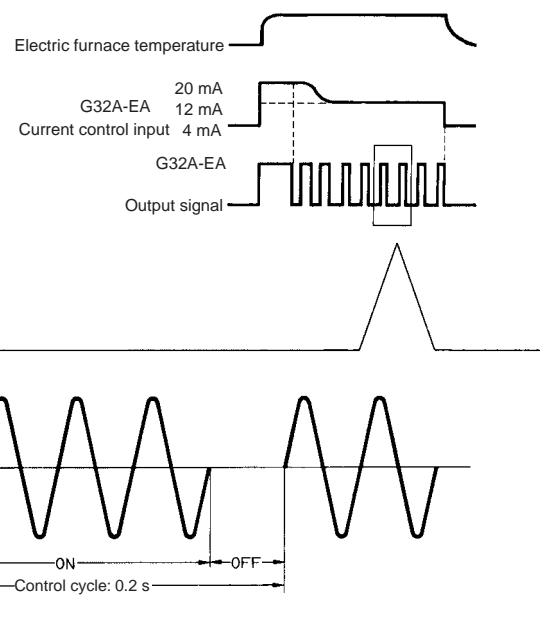


Operation

Application Examples


High-precision temperature control can be achieved in combination with the G3PA.

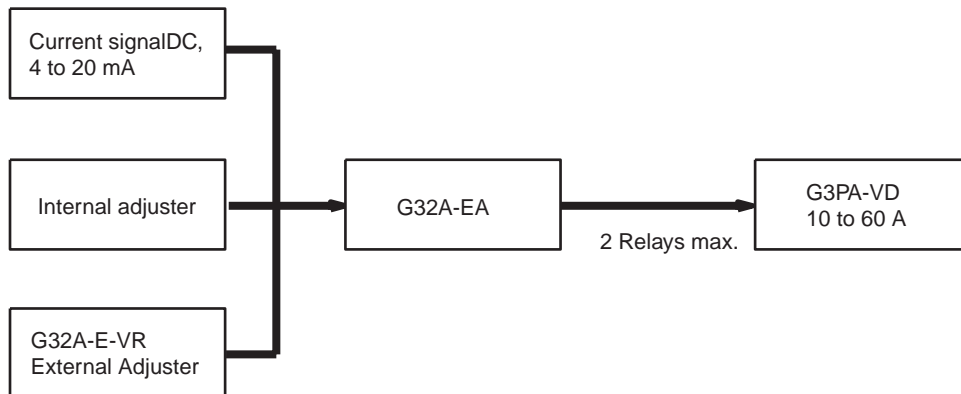


1. Control Using Current Input

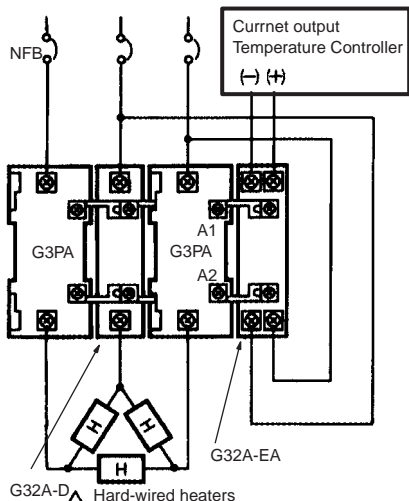

3. Control Using Internal Adjuster

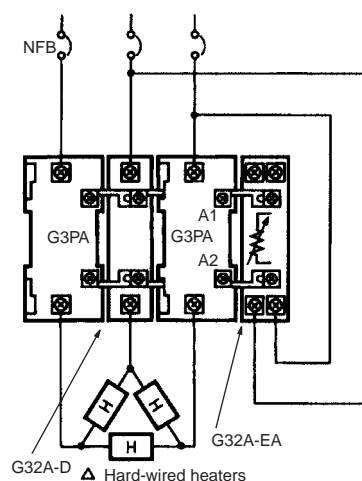

2. Control Using External Adjuster

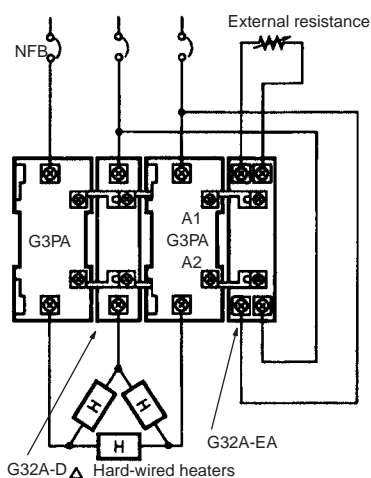

Applications 1, 2, and 3 each use a different type of input method and so it is necessary to change the settings of the input selection slide switches. Be sure to change the slide switch settings in accordance with the input method on page 91.

Note: 1. For details of input selection slide switch settings, refer to *Setting the Input Method*.



2. The above examples are for when a G3PA-VD (except 60-A models) is used at 200 VAC.

External Adjuster


G32A-E-VR

The external adjuster, its adjuster knob, and its nameplate, all come in a set (G32A-E-VR).

External Adjuster (50 kΩ, B Characteristic)

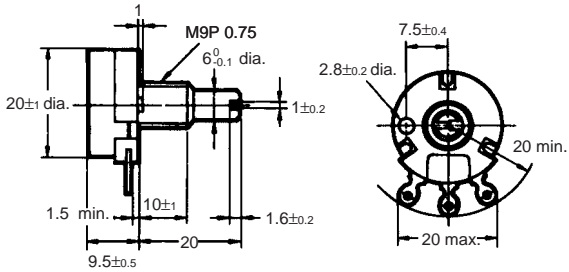


When wiring, connect in the way shown below.

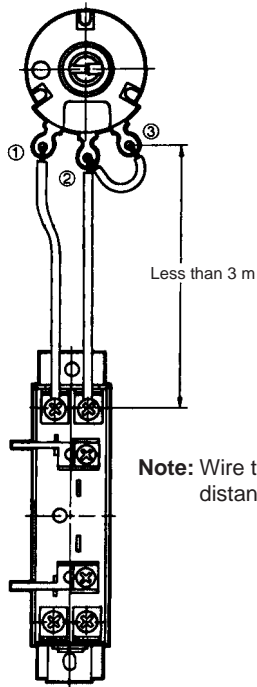


Note: Wire the external adjuster at a distance of less than 3 m.

Nameplate



Note: When using the external adjuster for input, be sure to set the input selection slide switches accordingly.



Knob



Dimensions

Note: All units are in millimeters unless otherwise indicated.


G32A-EA-US

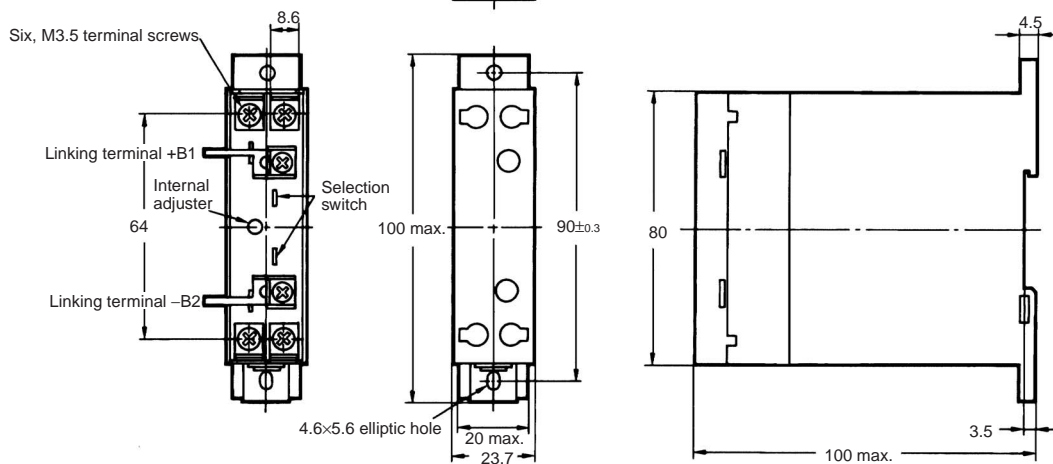


Without Terminal Cover

With Terminal Cover

Terminal Arrangement/ Internal Connection



Mounting Holes

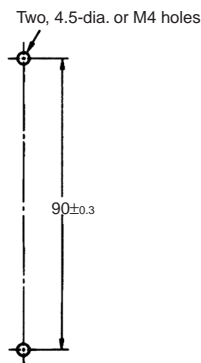

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.