

NEW


G9SX-SM  
G9SX-LM



OMRON



Better Productivity by Standstill and  
Low-speed Monitoring

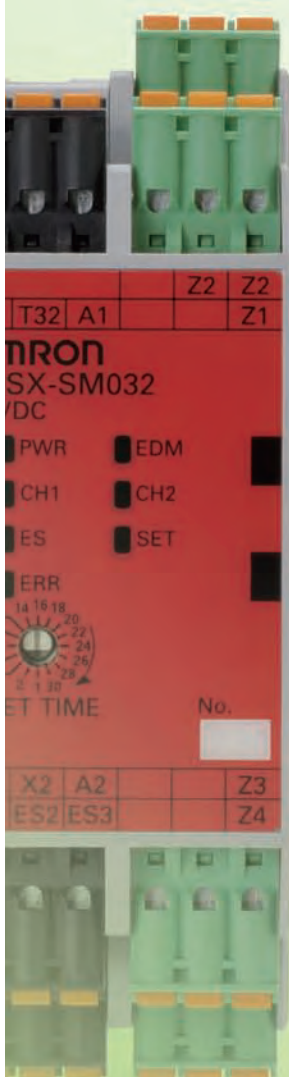


realizing

# Standstill Monitoring Reduces Extra Waiting Time During Work

## Problem

When a hazardous part has a long inertia, door-lock control using an off-delay timer results in extra waiting.

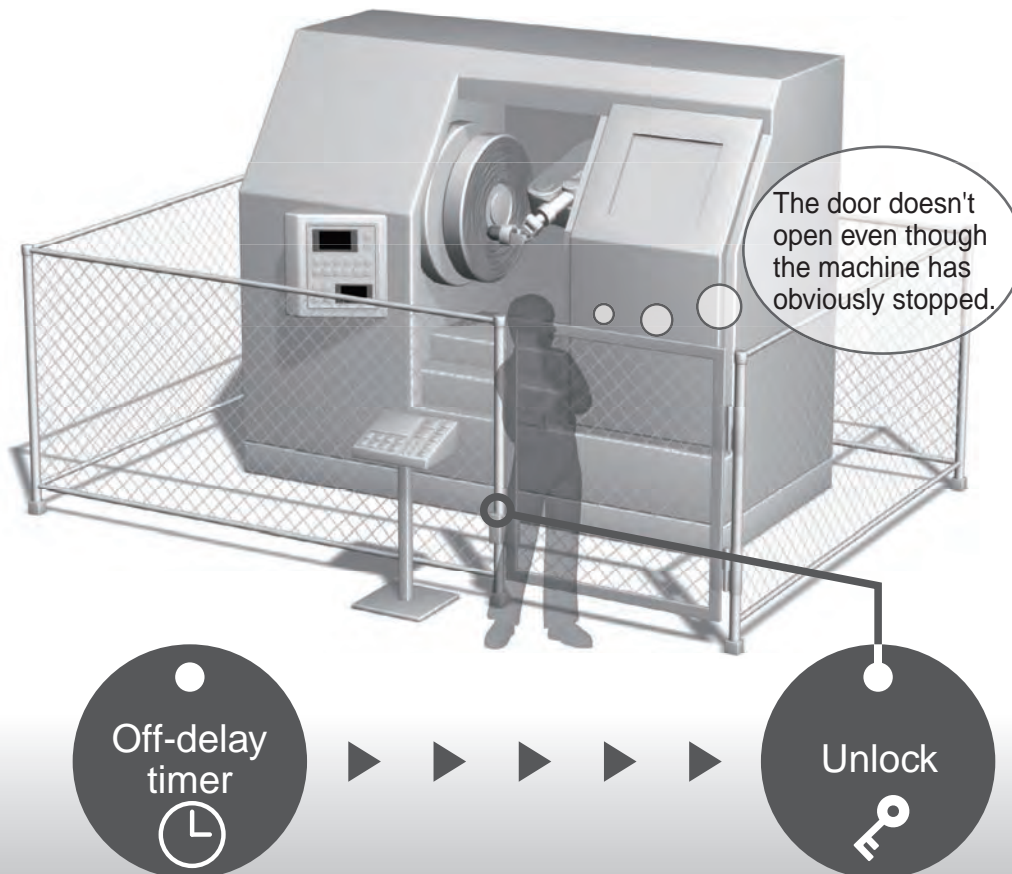


Waiting  
is  
a waste  
of time.

When the time required for a hazardous part to stop varies with different conditions, the off-delay had to be set with an extra margin of time.

Examples:


The stopping time changes when the workpiece changes.

The stopping time changes when the rotational speed changes.

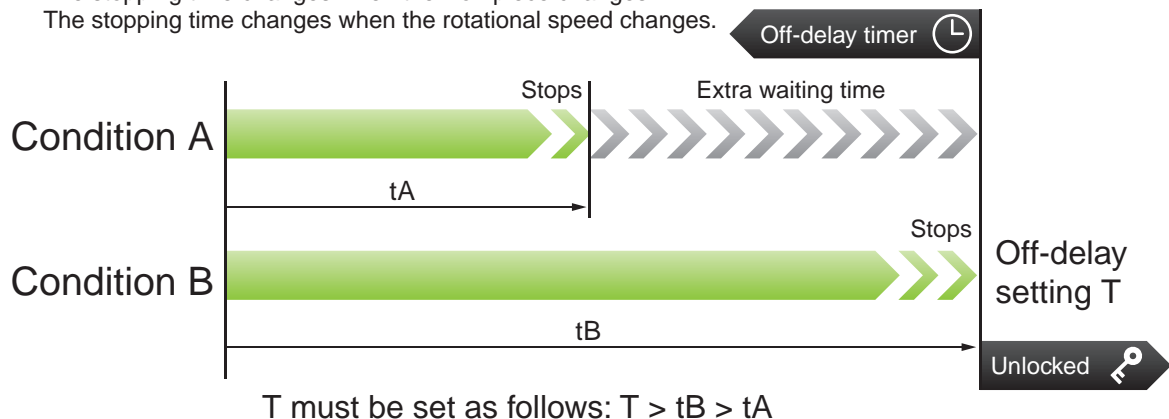

## Solution

Extra waiting time is reduced by monitoring the motor's movement, then unlocking the door as soon as the motor stops.

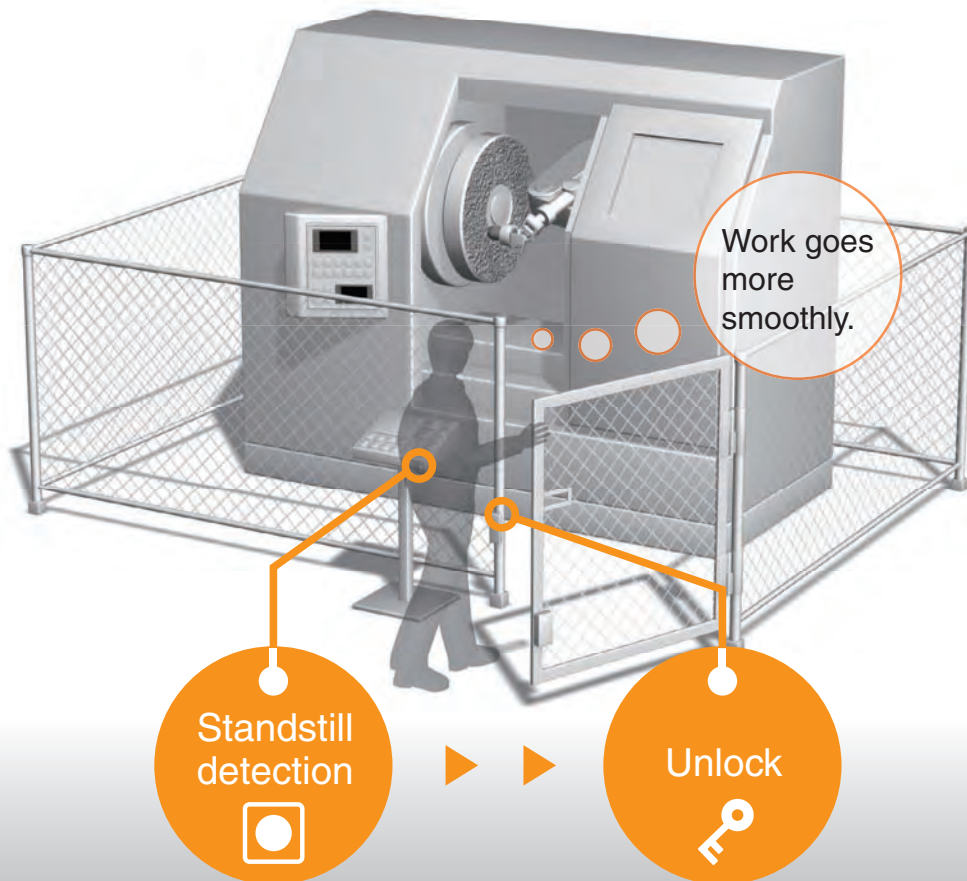

Waiting  
time  
is  
reduced.

Productivity  
improved!

### G9SX-SM Requiring No Sensor Safety Category 4


Can also be used with inverter control applications.

\* Cannot be used for Servomotors.



### G9SX-LM Using Proximity Sensors Safety Category 3

Can be used with a variety of applications, including Servomotors.

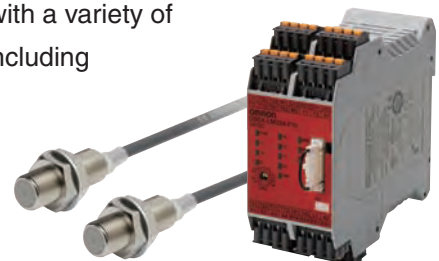

## Complies with Global Safety Standards

Standstill and low-speed monitoring are required by international standards for machine tools, printing presses, and other applications. The G9SX Series can reliably be used in these applications, due to its certification for various safety standards.

The G9SX-SM meets Safety Category 4 requirements, and the G9SX-LM meets Safety Category 3 requirements.





## Easy Setting with No Sensor Required

Standstill can be detected even when there is no space to install a sensor.

Safety Category 4 (EN954-1)

### No Sensor Required

Detection of BEMF generated by the motor eliminates the need to install a sensor.

1

### Ready to use "Standard Configuration"

User Configuration also available for fine-tuning.

2


### With Inverters

Applicable to inverter controlled systems.

3

## 1 No Sensor Required

The G9SX-SM detects the back electromotive force (BEMF) that is generated when the motor rotates in order to determine whether the motor is rotating or in standstill condition. Because the BEMF value varies with the motor revolution, the G9SX-SM determines that the motor has stopped when it detects that the BEMF has fallen below a set criterion.

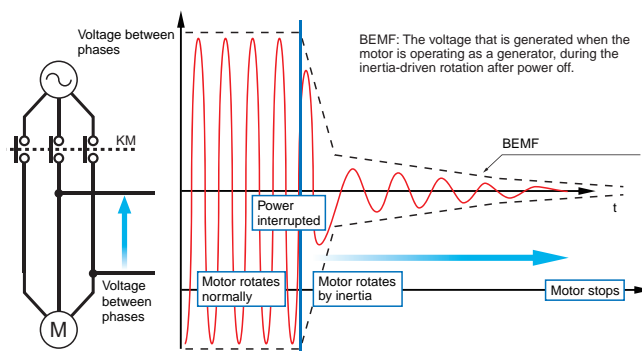

## 2 No Complicated Settings Required

You can start monitoring by simply connecting the G9SX-SM system in Standard Configuration without any sensitivity adjustment.

Standard Configuration ▶

Connect

Start monitoring

With the "User Configuration", sensitivity can be manually adjusted for each machine.


## 3 With Inverters

The G9SX-SM can be used with an inverter, without resulting in malfunctions due to the inverter's dynamic brake or auto-tuning functions.



## System Configuration

This system detects that the machine has stopped, and unlocks the door with the appropriate timing.

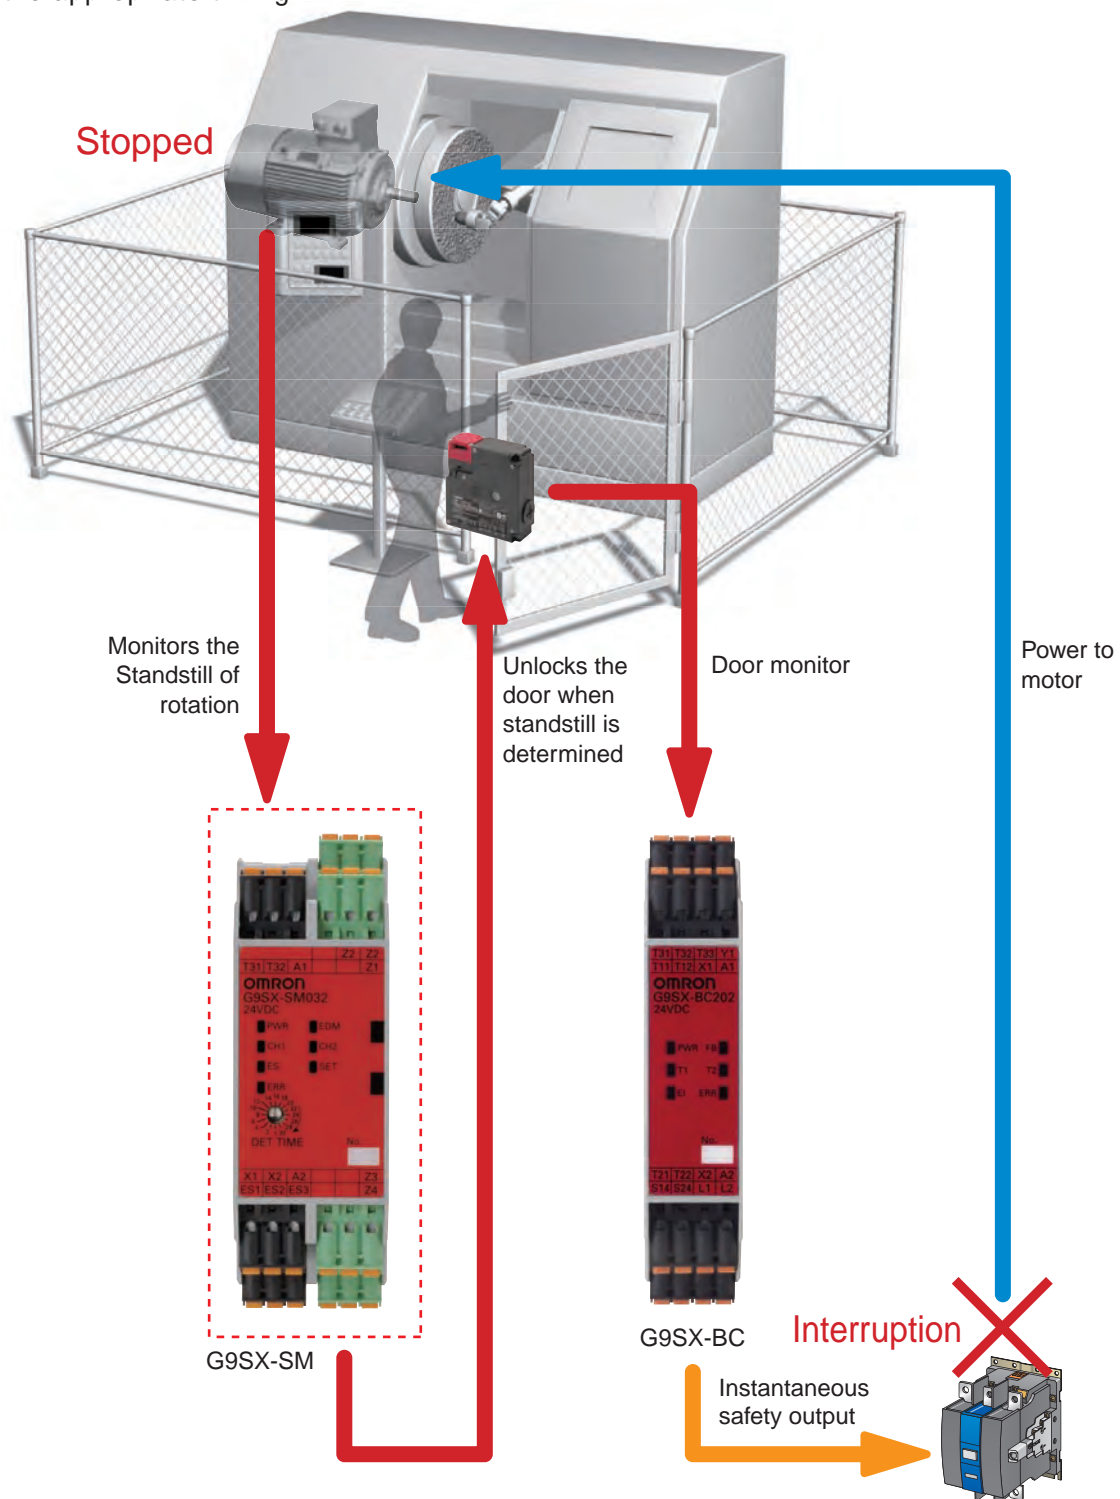

## Direct Monitoring with Proximity Sensors

Applicable to Various Systems,  
Including Servomotors

Safety Category 3 (EN954-1)

### Monitoring with Proximity Sensors

Combination of general-purpose proximity sensors and the fault diagnosis of G9SX provide a Category 3 system.

1

### Low-speed Monitoring

In addition to standstill monitoring, the G9SX-LM features a low-speed monitoring function for maintenance work.

2

### Applicable to Servomotors


Because rotation is directly monitored with sensors, the G9SX-LM can be used with any motor type or control method.

3

## 1 Monitoring with Proximity Sensors

A redundant safety system can be configured by using two E2E Proximity Sensors. The fault diagnosis function of the G9SX-LM provides a high level of safety.

\* Use only the DC 3-wire PNP type E2E.

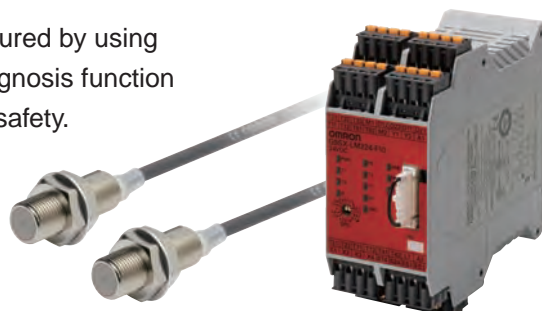


Safety Category 3 (EN954-1)

## 2 Speed Monitoring Matched to the Function for Each Operating Mode

In normal operating mode, standstill is monitored to unlock the door.


In maintenance mode, low-speed operation is monitored to allow maintenance work.

Standstill Monitoring

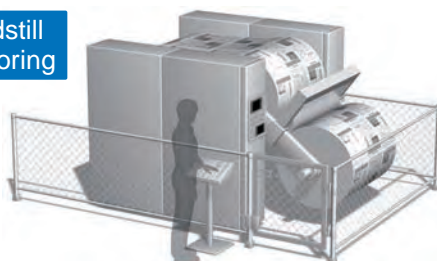

Normal operating mode

Low-speed Monitoring

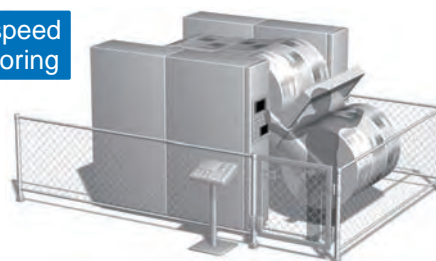

Maintenance mode

## 3 Applicable to Servomotors


Because the drive rotation is directly monitored, the G9SX-LM can also be used with Servomotors.





## Problem

Achieving safety during maintenance work.

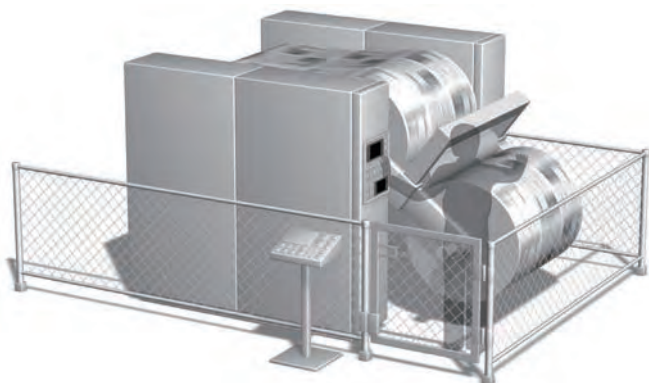


The machine must sometimes be operated for irregular operations, such as maintenance.



Is the operator's safety assured?


## Solution

Operate the machine at low speed, and monitor the speed.

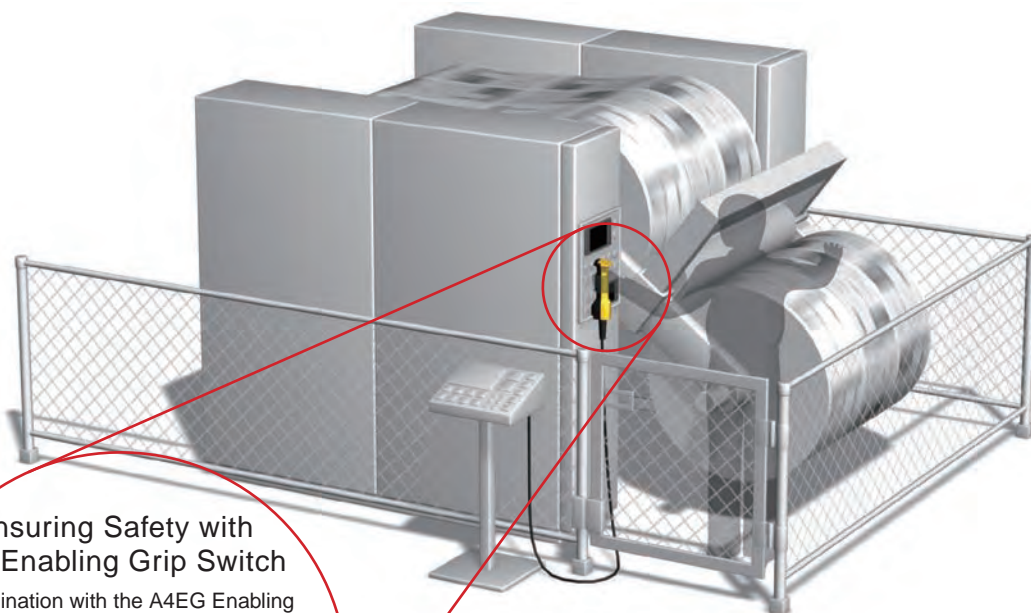

### Ensuring Safety with the Enabling Grip Switch

Combination with the A4EG Enabling Grip Switch ensures operator safety.

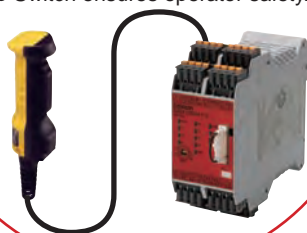

In order to ensure operator safety...

1

Operate the machine with the Enabling Grip Switch.



2

Monitor that the machine is operating below the preset speed.



3

If the speed exceeds the preset value, stop the machine immediately.

If the Enabling Grip Switch is pressed or released, stop the machine immediately.

# Standstill Monitoring Unit

# G9SX-SM

## Sensor-less Monitoring of Standstill for Machines with Long Inertia

- Standstill is monitored by the motor's back electromotive force (BEMF) signal.
- Features a "Standard Configuration", allowing immediate use without sensitivity adjustment.
- "User Configuration" also available for fine-tuning of sensitivity.
- Detailed LED indications enable easy fault diagnosis.
- Safety Category 4 (EN954-1), PLe (ISO13849-1), and SIL 3 (IEC/EN 62061) certified.



**NEW**

## List of Models

### Standstill Monitoring Unit

Safety outputs	Safety standstill detection output	Auxiliary output	Rated voltage	Terminal block type	Model
---	3	2	24 VDC	Screw terminals	<b>G9SX-SM032-RT</b>
				Spring-cage terminals	<b>G9SX-SM032-RC</b>

## Ratings

### Power input

Item	Model	G9SX-SM032-□
Rated supply voltage		24 VDC
Operating voltage range		–15% to 10% of rated supply voltage
Rated power consumption *		4 W max.

\* Power consumption of loads not included.

### Inputs

Item	Model	G9SX-SM032-□
Rated power supply voltage for AC induction motor		415 VAC max. (50/60 Hz)
Input voltage		Standstill detection input (between Z1 and Z2 and between Z4 and Z4) *1 415 VAC max.
Internal impedance		Standstill detection input: Approx. 660 kΩ EDM input: Approx. 2.8 kΩ *2

\*1. Input the motor phase-to-phase voltage between Z1 and Z2 and between Z3 and Z4.


\*2. Use a contact that is applicable to microloads (24 VDC, 5 mA) for connection to the EDM input.

### Outputs

Item	Model	G9SX-SM032-□
Safety standstill detection output *1		Sourcing output (PNP), load current: 0.3 A DC max. *2
Auxiliary output (output monitor/error)		Sourcing output (PNP), load current: 100 mA DC max.

\*1. While safety standstill detection outputs are in the ON state, the following pulse signal is output continuously for output circuit diagnosis.

When using the safety standstill detection outputs as input signals to control devices (i.e. Programmable Controllers), consider the pulse signal shown below.



\*2. The following derating is required when Units are mounted side-by-side.

G9SX-SM032-□: 0.2 A max. load current




## Dimensions and Terminal Arrangement

(Unit: mm)

### Standstill Monitoring Unit

G9SX-SM032-□

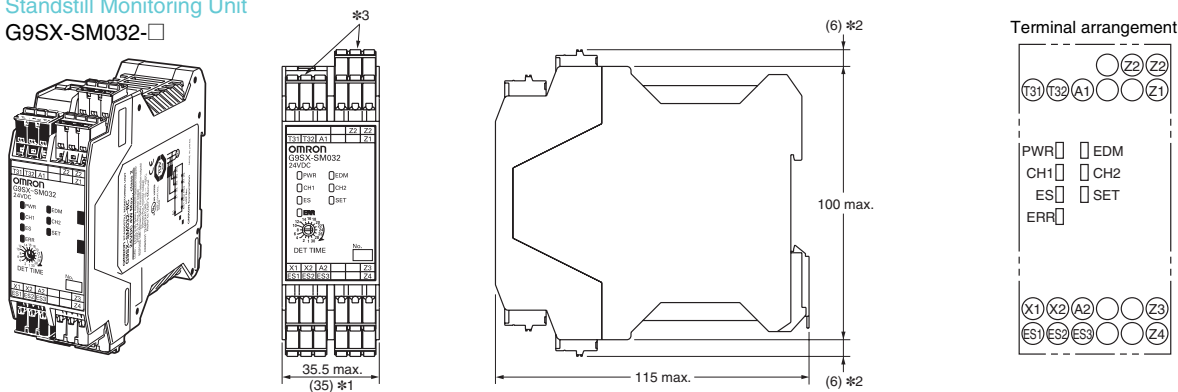

\*1. Typical dimension


\*2. For -RC terminal type only.

\*3. The terminal colors are green for the Unit right side (standstill detection input) and black for the left side.

Note: Above outline drawing is for -RC terminal type.

## Application Example

G9SX-SM032 (24 VDC) (3-phase Induction Motor) + G9SX-AD322-T15 (24 VDC)  
(Guard Lock Safety Door Switch, 2-channel Safety Limit Switch Inputs / Manual Reset)

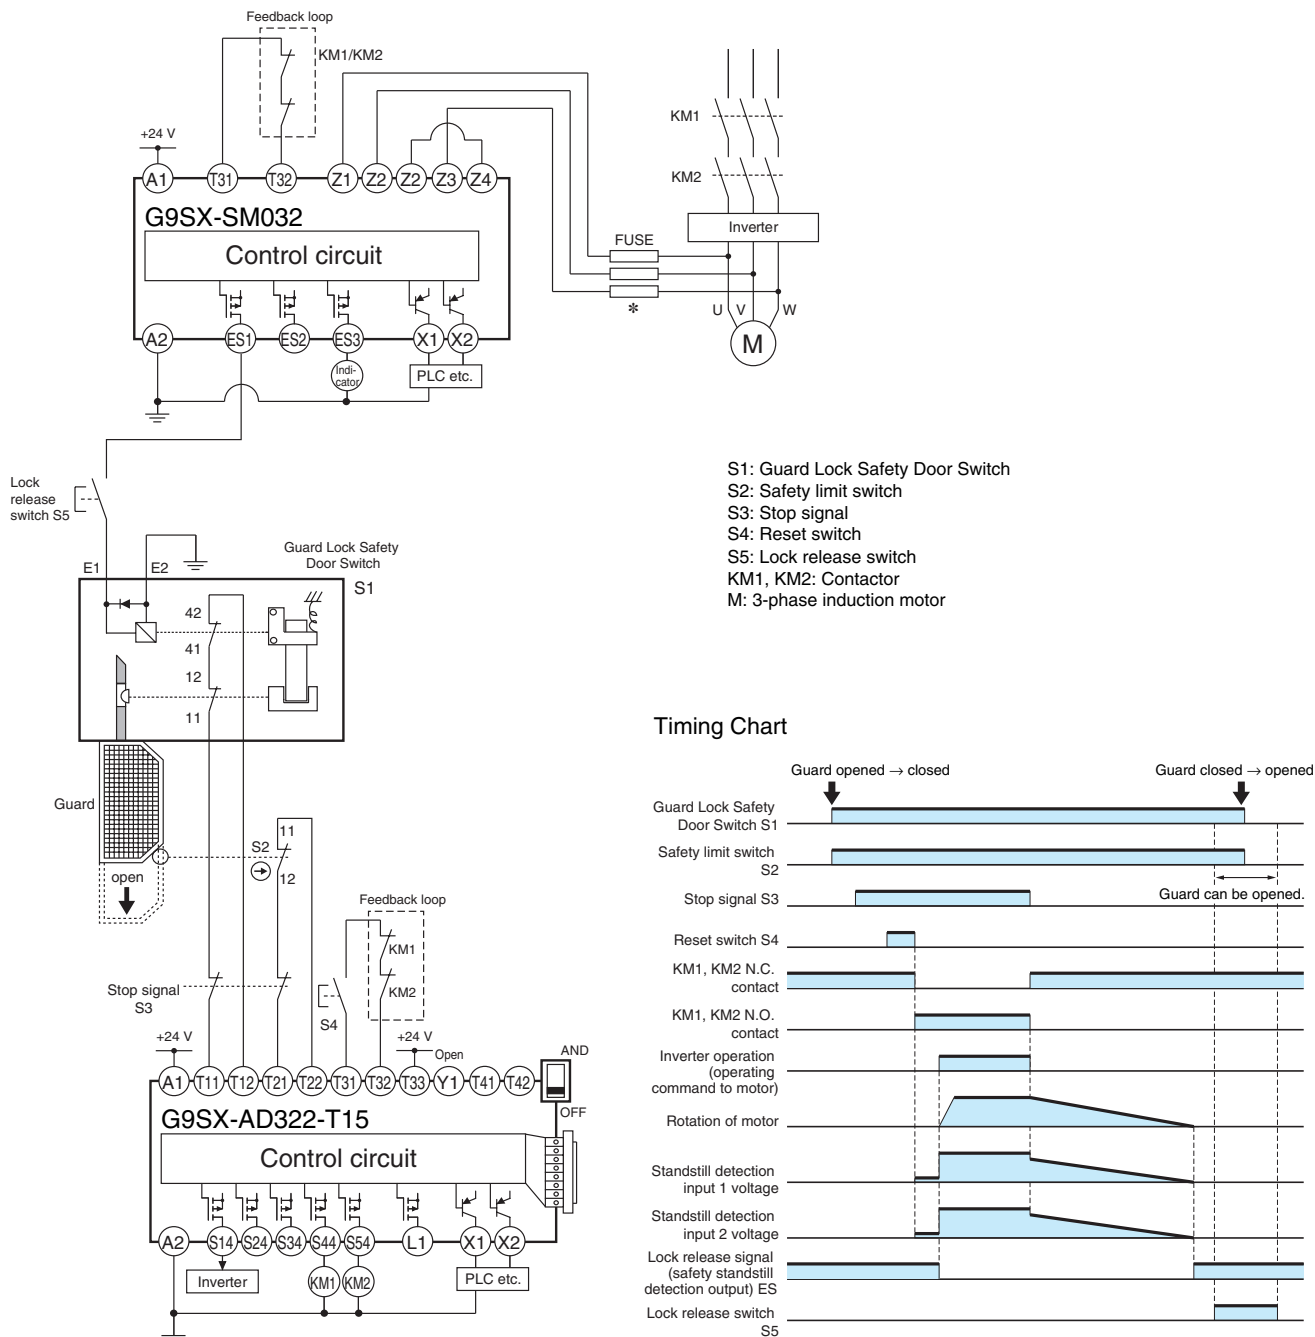

Note: This circuit example is equivalent to Safety Category 4 (Stop Category 1).

\* For short-circuit protection due to incorrect wiring, use a fuse that meets the following conditions:

Rated voltage: Motor supply voltage or more

Rated current: 1 A max.

# Low-speed Monitoring Unit

## G9SX-LM



## Low-speed Monitoring Function Ensures Safety for Maintenance Work

- Motor rotation speed detected by Proximity Sensor.
- Monitors and confirms that speed does not exceed the preset level.
- Includes an Enabling Switch input for maintenance work.
- Detailed LED indications enable easy fault diagnosis.
- Safety Category 3 (EN954-1), PLd (ISO13849-1), and SIL 3 (IEC/EN 62061) certified.



**NEW**

## List of Models

### Low-speed Monitoring Unit

Instantaneous safety output	Safety slow-speed/stopping detection output	Auxiliary output	Maximum set threshold	Rated voltage	Terminal block type	Model
2 (Semiconductor)	2 (Semiconductor)	4 (Semiconductor)	10 Hz	24 VDC	Screw terminals	<b>G9SX-LM224-F10-RT</b>
					Spring-cage terminals	<b>G9SX-LM224-F10-RC</b>

## Ratings

### Power input

Item	Model	G9SX-LM224-□	G9SX-EX401-□
Rated supply voltage		24 VDC	
Operating voltage range		-15% to 10% of rated supply voltage	
Power consumption *		5 W max.	2 W max

\* Power consumption of loads not included.

### Inputs


Item	Model	G9SX-LM224-□
Safety input Enabling input Feedback/reset input Mode selector input		Operating voltage: 20.4 VDC to 26.4 VDC Internal impedance: Approx. 2.8 kΩ *
Rotation detection input		Operating voltage: 20.4 VDC to 26.4 VDC Internal impedance: Approx. 2.8 kΩ Frequency input range: 1 kHz max.

\* Provide a current equal to or higher than that of the minimum applicable load of the connected input control device.

### Outputs

Item	Model	G9SX-LM224-□
Safety instantaneous output *1		Sourcing output (PNP compatible) Load current: 0.8 A DC max. *2
Safety speed detection output *1		Sourcing output (PNP compatible) Load current: 0.3 A DC max.
Auxiliary output		Sourcing output (PNP compatible) Load current: 100 mA DC max.

\*1. While safety instantaneous outputs and safety speed detection outputs are in the ON state, the following pulse signal is output continuously for output circuit diagnosis. When using these safety outputs as input signals to control devices (i.e. Programmable Controllers), consider the pulse signal shown below.

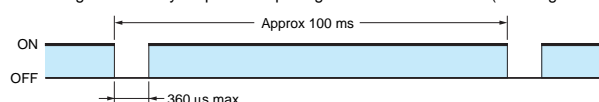



\*2. The following derating is required when Units are mounted side-by-side.  
G9SX-LM□: 0.4 A DC max. load current

## Dimensions and Terminal Arrangement

(Unit: mm)

### Low-speed Monitoring Unit


G9SX-LM224-F10-□

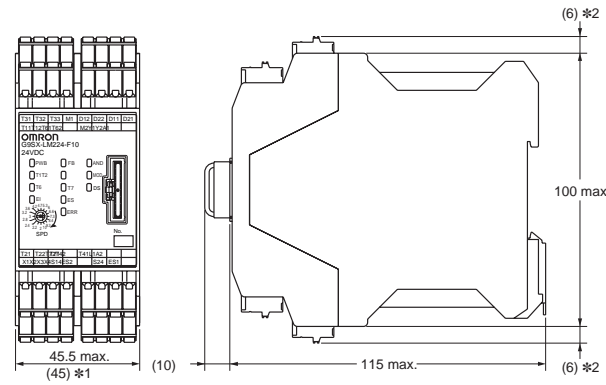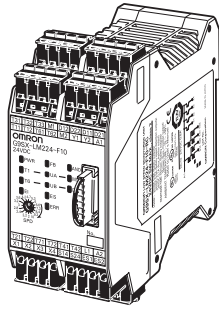

\*1. Typical dimension  
\*2. For -RC terminal type only.


Note: Above outline drawing is for -RC terminal type.

### Terminal arrangement

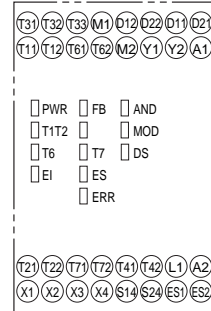


## Application Example


G9SX-LM224 (24 VDC) (Guard Lock Safety Door Switch (Mechanical Lock),  
2-channel Safety Limit Switch Inputs/2-channel Enabling Switch Inputs/Manual Reset)

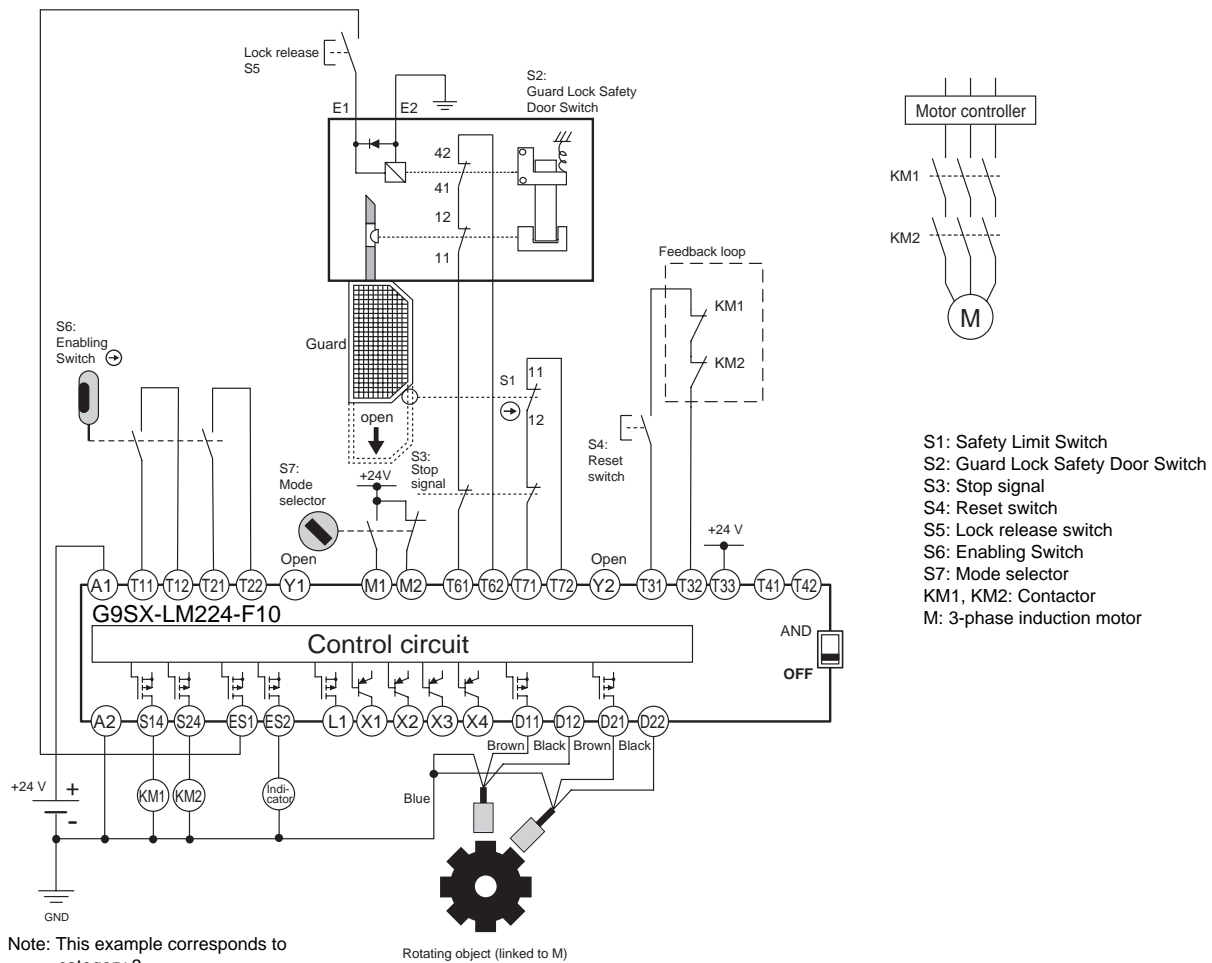

### Operating Time Chart For Normal Operating Mode (M1: ON, M2: OFF)

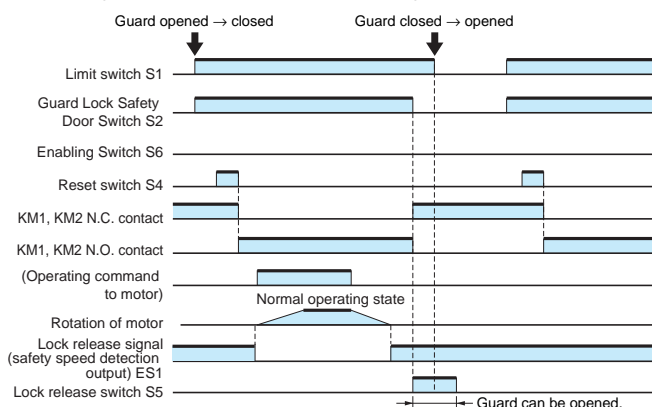

### Operating Time Chart For Maintenance Mode (M1: OFF, M2: ON)

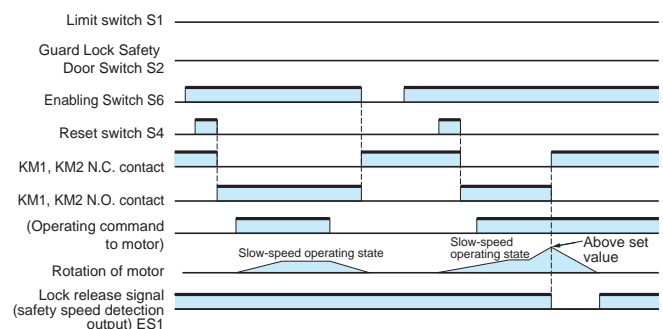



## READ AND UNDERSTAND THIS CATALOG

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranty and Limitations of Liability

#### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

#### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

### Application Considerations

#### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Disclaimers

#### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

#### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

#### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

#### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

#### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

### Copyright and Copy Permission

#### COPYRIGHT AND COPY PERMISSION

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

#### OMRON Corporation Industrial Automation Company

**Safety Devices Division**  
Shiokoji Horikawa, Shimogyo-ku,  
Kyoto, 600-8530 Japan  
Tel: (81) 75-344-7093/Fax: (81) 75-344-8197

#### Regional Headquarters

**OMRON EUROPE B.V.**  
Wegalaan 67-69-2132 JD Hoofddorp  
The Netherlands  
Tel: (31)2356-81-300/Fax: (31)2356-81-388

#### OMRON SCIENTIFIC TECHNOLOGIES INC.

6550 Dumbarton Circle, Fremont  
CA 94555-3605 U.S.A.  
Tel: (1) 510-608-3400/Fax: (1) 510-744-1442

#### OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark, Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

#### OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

#### Authorized Distributor:

© OMRON Corporation 2008 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.